





**SOLDER PREFORMS
MICRO D CONNECTORS**

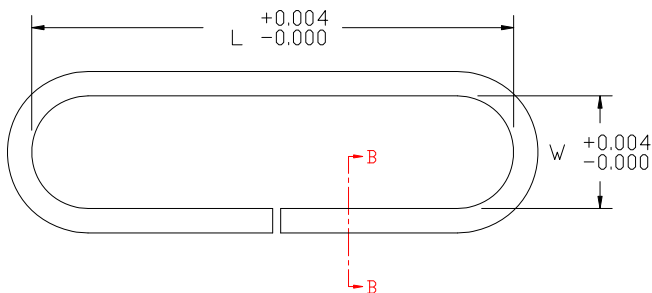

These preforms are designed specifically for SHP Micro D Connectors. They provide optimum flow and fillet when used with the recommended preform well and is available in one solder alloy per EIA J-STD-006: Sn63

CONNECTOR SERIES	NO. OF PINS	PREFORM PART NO. (see note 1)	L	W
HMMDA HMMDK HMMDS	9	MDPF-9P-63	.717	.249
	15	MDPF-15P-63	.867	.249
	21	MDPF-21P-63	1.017	.249
	25	MDPF-25P-63	1.117	.249
	31	MDPF-31P-63	1.267	.249
	37	MDPF-37P-63	1.417	.249
	51	MDPF-51P-63	1.367	.292

Solder Melting Temperature
Sn63 - 183°C (361°F)

All dimensions are inches.